

PHOTOMETRIC TEST REPORT

Manufactory:

Address: Guangzhou, China

Product: Warming Lamp

Tester: DAMIN

Type: W16

Date: 2020-10-12

STANDARD: SAE J845-2013

UNIT: cd.sec/min

TEST ITEMS	TEST LOCATION	LIMIT		TEST RESULT
		MAX.	MIN.	#1
Intensity	FLUX (lm)			
	VOLTAGE (V)			13.501
	CURRENT (A)			1.7087
	POWER (W)			23.069
	5U-90L	-	540	10715
	2.5U-90L	-	2430	12103
	H-90L	-	4860	14458
	2.5D-90L	-	2430	13408
	5D-90L	-	540	13130
	ZONE-90L	-	18000	63814
	5U-90L peak (cd)	-	22.8	369.8
	2.5U-90L peak (cd)	-	101.4	433.7
	H-90L peak (cd)	-	202.8	474.7
	2.5D-90L peak (cd)	-	101.4	488.6
	5D-90L peak (cd)	-	22.8	477.9
	ZONE-90L peak (cd)	-	752	2245
	5U-45L	-	540	10033
	2.5U-45L	-	2430	10953
	H-45L	-	4860	14025
	2.5D-45L	-	2430	12608
	5D-45L	-	540	13733
	ZONE-45L	-	18000	61352
	5U-45L peak (cd)	-	22.8	328.2
	2.5U-45L peak (cd)	-	101.4	392.4
	H-45L peak (cd)	-	202.8	440.5
	2.5D-45L peak (cd)	-	101.4	456.3
	5D-45L peak (cd)	-	22.8	445.9
	ZONE-45L peak (cd)	-	752	2063
	5U-V	-	540	12126
	2.5U-V	-	2430	13249
COLOR				Amber
REMARKS		-		

Test System: GO-HD SYSTEM
Temperature: 25°C

Instrument Status: OK
Humidity: 65%

PHOTOMETRIC TEST REPORT

Manufactory:

Address: Guangzhou, China

Product: Warming Lamp

Type: W16

STANDARD: SAE J845-2013

Tester: DAMIN

Date: 2020-10-12

UNIT: cd.sec/min

TEST ITEMS	TEST LOCATION	LIMIT		TEST RESULT
		MAX.	MIN.	#1
Intensity	H-V	-	4860	13485
	2.5D-V	-	2430	13065
	5D-V	-	540	13209
	ZONE-V	-	18000	65134
	5U-V peak (cd)	-	22.8	389.4
	2.5U-V peak (cd)	-	101.4	432.2
	H-V peak (cd)	-	202.8	456.8
	2.5D-V peak (cd)	-	101.4	453.9
	5D-V peak (cd)	-	22.8	414.6
	ZONE-V peak (cd)	-	752	2147
	5U-45R	-	540	11888
	2.5U-45R	-	2430	15107
	H-45R	-	4860	14051
	2.5D-45R	-	2430	15702
	5D-45R	-	540	12778
	ZONE-45R	-	18000	69526
	5U-45R peak (cd)	-	22.8	412.9
	2.5U-45R peak (cd)	-	101.4	475.9
	H-45R peak (cd)	-	202.8	505.9
	2.5D-45R peak (cd)	-	101.4	504.4
	5D-45R peak (cd)	-	22.8	465.8
	ZONE-45R peak (cd)	-	752	2365
	5U-90R	-	540	11383
	2.5U-90R	-	2430	13054
	H-90R	-	4860	13403
	2.5D-90R	-	2430	14608
	5D-90R	-	540	14446
	ZONE-90R	-	18000	66894
	5U-90R peak (cd)	-	22.8	395.0
	2.5U-90R peak (cd)	-	101.4	451.2
COLOR				Amber
REMARKS		-		

Test System: GO-HD SYSTEM
Temperature: 25°C

Instrument Status: OK
Humidity: 65%

EVERFINE

ECE R65 Je 光度曲线测试报告

第1组(在HV位置处测试):

Je : 314.08

Jm : 456.25


T : 0.8904

Th : 0.4462

C : 0.2

F : 0.49625

Td : 0.4442

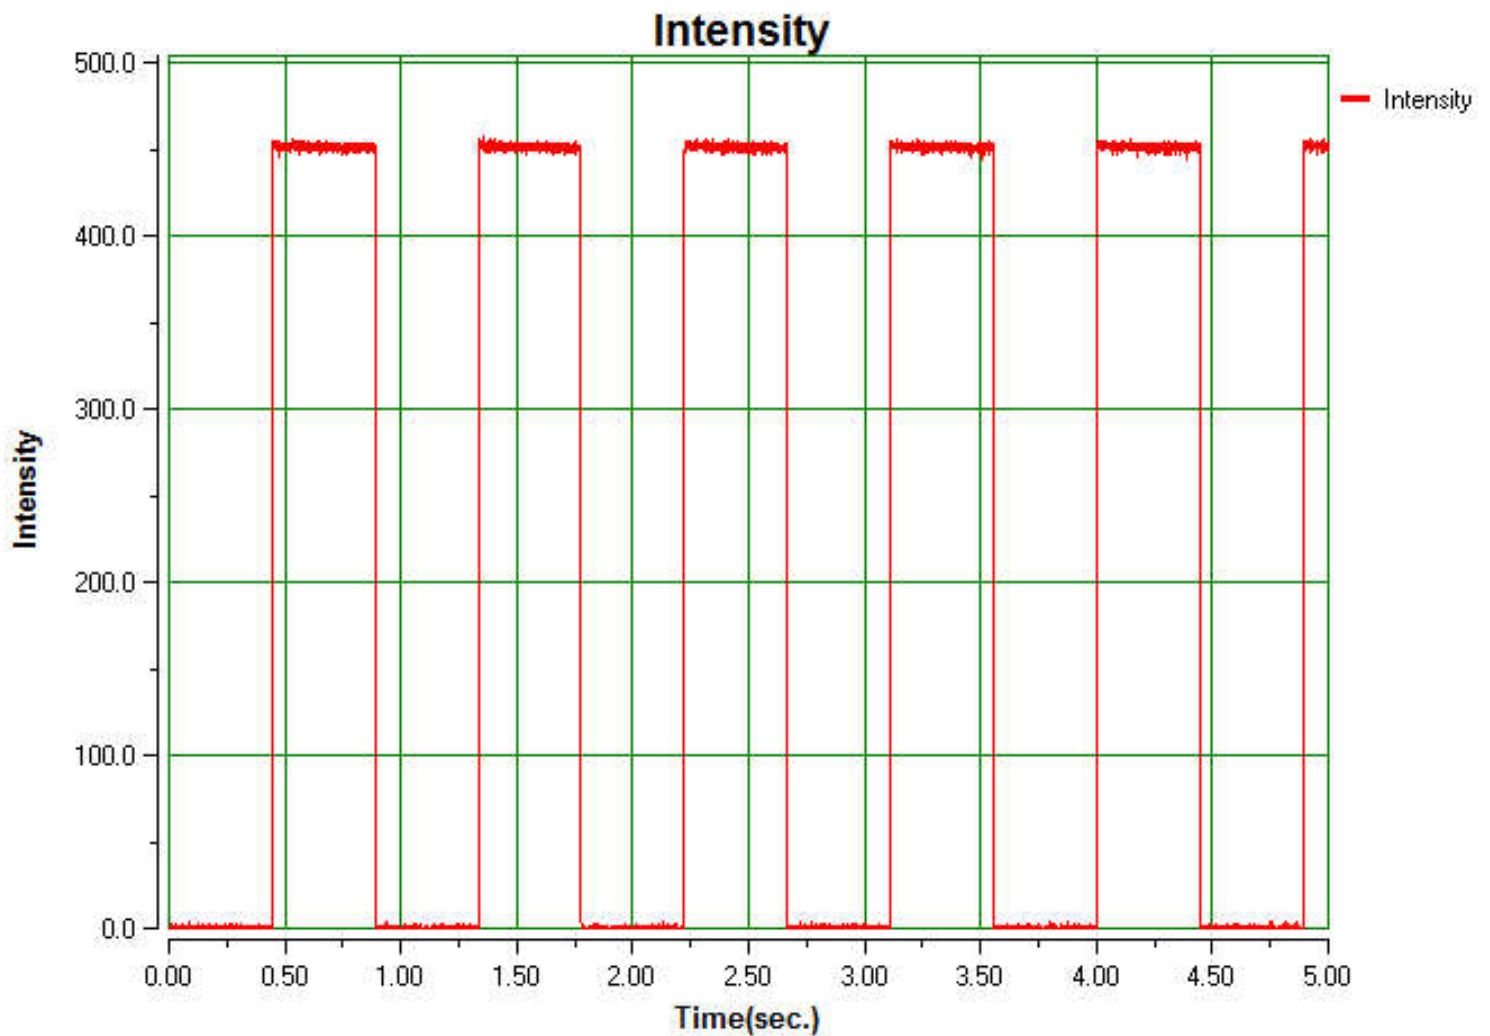

Test System: GO-HD SYSTEM
Temperature: 25°C

Instrument Status: OK
Humidity: 65%